



Ebravo

- Easy setup.
- Sound quality up to 192kHz/24bit.
- Low jitter reclocker.
- Galvanically isolated input to output.
- Elimination of digital and network noise.
- JPLAY Certified, Spotify Connect, TIDAL Connect, DLNA.

Specifications

Power Input	DC Jack 2.5/5.5mm, requires 12V, 1A
Audio Quality	Digital Audio Output: Bit-perfect output, up to 192 kHz, 24-bit with digital optical, coaxial and AES output.
Network	802.11 b/g/n/ac 2.4 GHz and 5 GHz dual bands Wi-Fi 10/100M Ethernet
Bluetooth	Bluetooth 5.1
Audio Output	Optical*1, Coax*1, AES*1 up to 192kHz/24-bit
Audio Coded Compliant	MP3, AAC, ALAC, APE, FLAC, WAV, WMA, OGG, AIFF
Streaming Protocol	DLNA, Spotify Connect, TIDAL Connect
Streaming Services in App	Spotify, Deezer, TunesIn, Tidal, Qobuz, etc.
Weight	1 KG
Dimension (WxDxH)	220 x 220 x 66 mm

Ewave

- Independent Power Design
- 25 MHz OCXO (Oven-Controlled Crystal Oscillator)
- Per-Port Control
- Audio-Priority QoS
- 8 Gigabit Ports
- In-House Circuit Design



Specifications

Power Input	DC Jack 2.5/5.5mm, requires 12V, 1A
Cooper Ports	10/100/1000 Mbps x8
Weight	4 KG
Dimension (WxDxH)	220 x 220 x 66 mm



Creating Immersive Sound with artful modern Aesthetics

- Essential series



KECES
the Audio *Perfection.*



The rice can satisfy people's appetite easily, there is beauty in simplicity.

Behind the every grains of rice lies enthusiasm and dedication to the audio industry of KECES

KECES
the Audio *Perfection.*



HUI KANG Electronic Co., LTD.
2F, No. 4, Ln. 163, Xinyi Rd., Bangiao Dist., New Taipei City 220636, Taiwan.
Tel: +886-2-29011018 FAX: +886-2-29011030 | Email: keces@hulkangcorp.com



Specifications

Power Input	115V/230V AC Switchable, 50/60Hz
Network	802.11 b/g/n/ac 2.4 GHz and 5 GHz dual bands Wi-Fi 10/100M Ethernet
Bluetooth	Bluetooth 5.1
Digital Input	Optical and Coax, PCM support up to 192kHz/24-bit. DSD support up to DS64. USB, PCM support up to 384kHz/32-bit. DSD support up to DSD256.
Digital Output	Optical*1, Coax*1 PCM up to 192kHz/24-bit.
Analog Output	XLR SNR>110dB THD+N <0.01% Output 4.5Vrms. RCA SNR>110dB THD+N <0.01% Output 3Vrms.
Audio Coned Compliant	MP3, AAC, ALAC, APE, FLAC, WAV, WMA, OGG, AIFF
Streaming Protocol	DLNA, Spotify Connect, TIDAL Connect
Streaming Services in App	Spotify, Deezer, Tunesin, Tidal, Qobuz, etc.
Weight	3 KG
Dimension	220 x 220 x 66 mm




Fully Balanced Discrete I/V Conversion



Unrivaled Digital Audio Processor



Integrated Network Streaming

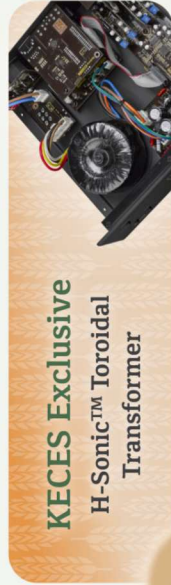

KECES Exclusive H-Sonic™ Toroidal Transformer



- Separated Power Supply Design
- Proprietary H-Sonic™ Toroidal Transformer
- Versatile Cartridge Compatibility
- Balanced and Unbalanced Outputs
- Premium Connector Configuration
- Adjustable Impedance and Gain Settings
- Subsonic Filter Toggle Function
- Ultra-Low Noise Linear Power Supply with OTP Protection

Specifications

	Euphony+
Frequency Response	20Hz-20kHz
THD	MM <0.02%, MC <0.05%, Optical <0.04%
S/N Ratio	MM 78dB, MC 70dB, Optical 75dB
Input Impedance	MM 47k ohm, MC 56/100/220 ohm
Input Capacitance	100pF
Gain	46dB/52dB for MM, 66dB/72dB for MC, 24dB/30dB for OPT
Power In	DC ±24V (Power by Euphony Plus Power)
Weight	2 KG
Dimension (WxDxH)	220 x 220 x 66 mm
	Euphony+ Power
AC Input Voltage	110V-120V, 60Hz / 220V-240V, 50Hz (Switchable)
DC output Voltage	±24V
Power Consumption	36 Watts
Weight	3 KG
Dimension (WxDxH)	220 x 220 x 66 mm